

BE FIRST REGENERATION LIMITED
FAMBRIDGE ROAD GARAGES,
DAGENHAM, RM8 1NS

Preliminary BS5837:2012 Tree Survey Report

APRIL 2021



FAMBRIDGE ROAD GARAGES, DAGENHAM, RM8 1NS

Preliminary BS5837:2012 Tree Survey Report

Author James Potts



Checker Brandon Murray



Approver Martina Girvan



Report No 10046791-AUK-XX-XX-RP-AB-0095-01-Fambridge Road Arboricultural Report

Date APRIL 2021

VERSION CONTROL

Version	Date	Author	Changes
01	April 2021	James Potts	1 st Issue

This report dated 22 April 2021 has been prepared for Be First Regeneration Limited (the "Client") in accordance with the terms and conditions of appointment (the "Appointment") between the Client and Arcadis UK Limited ("Arcadis") for the purposes specified in the Appointment. For avoidance of doubt, no other person(s) may use or rely upon this report or its contents, and Arcadis accepts no responsibility for any such use or reliance thereon by any other third party.

CONTENTS

1	INTRODUCTION	1
1.1	Overview	1
1.2	Site Location and Setting.....	1
2	METHODOLOGY	2
2.1	Tree Survey Methodology.....	2
2.2	Individual Trees and General Data Capture	2
2.3	Categorisation.....	2
2.4	Root Protection Area.....	2
2.5	Survey Limitations.....	3
2.6	Statutory Tree Protection.....	3
3	TREE SURVEY RESULTS	4
3.1	Tree Assessment and Categorisation	4
3.2	Tree Species Diversity	4
3.3	Age Diversity	4
4	DISCUSSION AND CONCLUSIONS	5
5	FURTHER WORK	6
6	REFERENCES	7
	FIGURE 1. TREE CONSTRAINTS PLAN	8
	APPENDIX A. EXPLANATION OF TERMS.....	9
	APPENDIX B. TREE SCHEDULES	10
	APPENDIX C. PRELIMINARY ARBORICULTURAL METHOD STATEMENT	12
	APPENDIX D. PHOTOGRAPHS.....	17
	APPENDIX E. TPO MAP.....	21

1 Introduction

1.1 Overview

Arcadis (UK) Limited (Arcadis) was commissioned by Be First Regeneration Limited on behalf of London Borough of Barking and Dagenham Council to undertake a number of technical surveys to support the feasibility for potential development of land at three garage blocks adjacent to Fambridge Road, Dagenham, RM8 1NS, hereafter referred to as “the Site”.

The objective of this assessment is to present the potential constraints and future requirements with regards to trees in relation to any future development.

1.2 Site Location and Setting

The Site is split into three areas hereafter referred to as the ‘North Site’, the ‘East Site’ and the ‘South Site’, located off Fambridge Road in the London Borough of Barking and Dagenham, centred around the postcode RM8 1NS.

The North Site is located west of Fambridge Road, to the rear of properties adjoining Temple avenue to the West. It is centred at grid reference TQ 49096 87472 and measures 560m².

The East Site is located to the south of Fambridge Road, directly adjacent to house number 16. It is centred at grid reference TQ 49191 87407 and measures 500m².

The South Site is located to the east of Fambridge Road, directly south of House number 2. It is centred at grid reference TQ 49145 87360 and measures 600m².

The immediate surroundings of the area are residential properties to the north and west, allotments to the east and All Saints Catholic School Playing Fields to the south.

An aerial screen shot illustrating the Site boundary is presented in Image 1-1. Photographs of the Site and trees can be found in Appendix D - Photographs.

Image 1-1 Site Location Plan



2 Methodology

2.1 Tree Survey Methodology

An Arboricultural Survey was undertaken by Martin Dilworth FdSc MArborA (Senior Arboriculturist) on 31 March 2021 in accordance with BS 5837:2012.

Observations were conducted from ground level, utilising the “Visual Tree Assessment” (VTA) system as outlined in *The Body Language of Trees, A Handbook for Failure Analysis Research for Amenity Trees No.4* (Department of the Environment, 1994) with the aid of binoculars.

The Site and its immediate surroundings were surveyed. Where accessible, an area of 15m beyond the site boundary was surveyed. This area is referred to as the study area.

2.2 Individual Trees and General Data Capture

For reference, individual trees are identified with the letter T and associated number on the Tree Schedules and a Tree Constraints Plan. The stem diameter of the trees on Site was recorded using a rounded down diameter tape at 1.5m above ground level. Measurements were taken in millimetres. The height of the subject trees was estimated to the nearest metre using a digital clinometer.

Maximum crown spread of the subject tree was measured from the centre of the trunk to the tips of the live lateral branches taken at four compass points (N-E-S-W) using a ground tape. Crown spread measurements were taken in metres.

Age class was estimated from visual indicators (such as tree size, morphology or appearance of bark) which was taken as a provisional guide. Age class estimates may be modified based on further information such as historical records and local knowledge.

If direct access to the tree was not possible, estimations from appropriate vantage points were taken, any limitations or estimations are presented within the survey limitations section and noted in the associated schedules.

For the purposes of BS 5837: 2012, only trees with a stem diameter greater than 75mm, (measured at 1.5m above ground level), have been included within the survey; however, it should be noted that a number of individual trees and shrubs with a stem diameter of less than 75mm were present within the study area. Only trees within the study area as defined above were assessed.

2.3 Categorisation

In compliance with Table 1 of BS 5837: 2012 the trees surveyed have been categorised according to their arboricultural quality and value. A glossary of survey terms can be found in Appendix A - Explanation of Terms.

2.4 Root Protection Area

The Root Protection Areas (RPA) of the trees were calculated in accordance with Section 4.6.1 in BS: 5837:2012. This is calculated from the measurement of the stem diameter at 1.5m above ground level or at ground level if the tree is multi-stemmed. RPAs are calculated using the stem diameter of a tree measured at 1.5m above ground level. The RPA represents an indicative area required for healthy rooting activity only. It should therefore be recognised that the calculated RPA may not entirely encompass all of the tree's rooting material.

No soil assessment or above/below ground investigations into the true extent of the trees rooting area were undertaken as they are beyond the scope of this report.

These are recorded in Table B2 in the appendix and as a circle on the initial Tree Constraints Plan (and Tree Impact and Protection Plan as appropriate) and form the initial Construction Exclusion Zone (CEZ) to protect the trees within and adjoining the Site. The RPA is represented by pink-shaded areas in the Tree Constraints Plan. The shape and size of RPAs can be amended in accordance with Section 4.6.3 in BS: 5837:2012.

2.5 Survey Limitations

Topographical base mapping was provided, however, some additional trees not picked up by the Topographical survey have been plotted by hand using local land-based features as reference points.

Some parts of the study area were off-site within neighbouring properties, preventing a full assessment and an accurate measurement of some trees. Where tree survey data has been estimated (based on assessments from the nearest safe vantage points). These trees are denoted by a # in the associated Schedules.

Trees are living organisms and as such their health and condition are naturally subject to change over time. Unforeseen future circumstances such as neglect, wilful damage or severe/extreme weather conditions may affect the future health and condition of the trees included in this report.

2.6 Statutory Tree Protection

A check with the London Borough of Barking and Dagenham on 12 April 2021 has established that one tree surveyed (T4) is subject to Area Tree Preservation Order Reference: TPO/13/2013, and two trees surveyed (T8 and T9) are subject to Area Tree Preservation Order Reference: TPO/1/2014. The study area is not situated inside or subject to Conservation Area restrictions (The Town and Country (Tree Preservation) (England) Regulations 2012).

3 Tree Survey Results

3.1 Tree Assessment and Categorisation

A total of nine arboricultural features were recorded within the study area (but all outside of the site redlines) as follows:

- Three individual trees (T1, T2, T3) were located in private gardens adjacent to the North Site;
- Two individual trees (T4, T5) were located in private gardens adjacent to the East Site;
- And four individual trees (T6, T7, T8, T9) were located on private or public land adjacent to the South Site.

Full details of the survey data are presented within the Tree Schedules in Appendix B and Figure 1 Tree Constraints Plan.

Each arboricultural item was assigned to one of four categories, as listed below:

- Category A features: No arboricultural features have been identified as Category A (trees of high quality) as part of this survey;
- Category B features: No arboricultural features have been identified as Category B (trees of moderate quality) as part of this survey;
- Category C features: Eight individual trees have been identified as Category C (trees of low quality) as part of this survey;
- Category U features: One individual has been identified as Category U (trees of poor quality unsuitable for retention) as part of this survey due to poor structural and physiological condition.

3.2 Tree Species Diversity

Eight tree species were recorded during the survey comprising a mix of small to medium sized ornamental broadleaves. Species recorded include Cherry Laurel *Prunus laurocerasus* (T6), Common Apple *Malus domestica* (T4), Common plum *Prunus domestica* (T3), Firethorn *Pyracantha coccinea* (T5), Holly *Ilex aquifolium* (T2), Privet *Ligustrum vulgare* (T8), Rowan *Sorbus aucuparia* (T1, T7) and Sycamore *Acer pseudoplatanus* (T9).

3.3 Age Diversity

All trees surveyed within the study area were within the Young to Mature age classifications set by BS 5837: 2012. Of these, two trees (T7, T9) were assessed as Young, four trees (T1, T2, T3, T5) were assessed as Semi-mature, two trees (T6, T8) were assessed as Early-mature and one tree (T4) was assessed as Mature.

4 Discussion and Conclusions

A total of nine arboricultural features were recorded within the study area as follows:

- Three individual trees (T1, T2, T3) were located in private gardens adjacent to the North Site;
- Two individual trees (T4, T5) were located in private gardens adjacent to the East Site;
- And four individual trees (T6, T7, T8, T9) were located on private or public land adjacent to the South Site.

Of the arboricultural features surveyed, eight individual trees (T1-T8) were graded at Category C (trees of low quality) and one individual tree (T9) was graded at Category U (trees of poor quality unsuitable for retention).

There is currently no proposed design layout and therefore it is not possible to say whether the trees would need to be removed and if there is space for any new trees to be re-provisioned on the Site. This can be determined once designs are developed.

It was confirmed by the London Borough of Barking and Dagenham that three trees surveyed are subject to Tree Preservation Order. These trees are off-site on third-party land. The study area is not situated inside nor subject to Conservation Area restrictions.

TPO'd trees are as follows:

- T4 is located inside and subject to Area Tree Preservation Order Reference TPO/13/2013;
- T8 and T9 are located inside and subject to Area Tree Preservation Order Reference: TPO/1/2014.

Trees under the ownership of third parties but within influencing distance of the site may present a constraint to development activities in terms of overhanging branches and encroaching roots. These trees must be considered during design preparation and must be retained and protected from future development works.

Protection for trees to be retained and tree re-provisioning for any trees lost due to development are material considerations for planning determination. Ideally adequate provision for tree replacement should be provided on-Site as part of the proposed scheme. However, if this is not feasible due to development constraints, off-Site options for tree re-provisioning to ensure no net loss should be considered. Individual Local Planning Authorities may ask for re-provisioning in excess of 1 to 1 for trees of Category B grade.

The main development considerations presented by trees within the study area are:

- Overhanging crowns;
- The planting location, height, width and density of the crowns will cast shade on to the Site; and
- The Root Protection Area (RPA) of third party trees adjacent to the Site, three of which are TPO'd.

Should any future proposed development require tree removals or construction works within RPAs of the retained trees an Arboricultural Impact Assessment (AIA) will be required by the LPA in support of a planning application.

A bespoke Arboricultural Method Statement may be required post planning and when the construction details are known to protect the retained trees on and adjacent to the Site.

All new tree planting should be in accordance with British Standard 8545: Trees: From Nursery to Independence in the Landscape – Recommendations, 2014 and all tree works must be carried out by a qualified contractor in accordance with BS3998:2010: Tree Work – Recommendations.

5 Further Work

Should any future proposed development require tree removals or RPA incursions within RPA's of the retained trees an Arboricultural Impact Assessment (AIA) will be required by the LPA in support of a planning application.

A review of any proposed development should be undertaken to ensure that there are no additional trees within the zone of influence of the development that require surveying. For example, parking requirements often extend the zone of influence.

The AIA should state the trees to be removed due to the design and access requirements and any proposed tree facilitation pruning works. This should also be accompanied by an assessment of the likely impacts due to construction activity on the trees to be retained. Indicative arboricultural mitigation measures should be provided which would include recommendations for tree re-provisioning. The AIA should be accompanied by an updated Tree Constraints Plan and a Tree Impact and Protection Plan based on the proposed design.

The AIA should also include a Tree Replacement Strategy which should take into consideration the landscape character, local treescape and biodiversity features of the immediate and adjoining areas. The species, number, size, type of stock, location and planting aids for the compensating planting should be chosen for landscape, wildlife and arboriculture values. To ensure that appropriate and sustainable planting is achieved advice should be sought from an ecologist and arboriculturist. Furthermore, liaison with the LPA Tree Officer will be necessary during the planning process to agree an approved tree compensation and or landscape scheme plan.

All new tree planting should be in accordance with British Standard 8545: Trees: From Nursery to Independence in the Landscape – Recommendations, 2014 and all tree works must be carried out by a qualified contractor in accordance with BS3998:2010: Tree Work – Recommendations.

This document encloses a Preliminary Arboricultural Method Statement (AMS) (Appendix C) outlining tree protection measures. However following planning determination and when full construction measures are known a bespoke AMS may be required to ensure protection of the trees to be retained on and adjoining the Site.

6 References

British Standards Institution (2010) BS 3998:2010, Tree Work Recommendations.

British Standards Institution (2012) BS 5837: 2012 Trees in relation to design, demolition and construction – Recommendations.

British Standards Institution (2014) BS 8545: Trees: From nursery to Independence in the Landscape – Recommendations.

Mattheck, C. and Broeler, H. DETR (1994) The Body Language of Trees: A Handbook for Failure Analysis Research for Amenity Trees No.4.




The Secretary of State for Communities and Local Government, Statutory Instruments (2012) No. 605, The Town and Country (Tree Preservation) (England) Regulations 2012.

FIGURE 1. Tree Constraints Plan



Legend:

- Site Boundary
- Canopy extent of A Category tree/group
- Canopy extent of B Category tree/group
- Canopy extent of C Category tree/group
- Canopy extent of U Category tree/group
- BS5837 Root Protection Area (RPA)

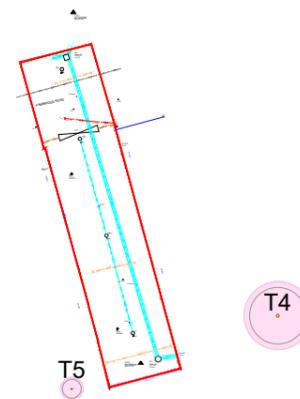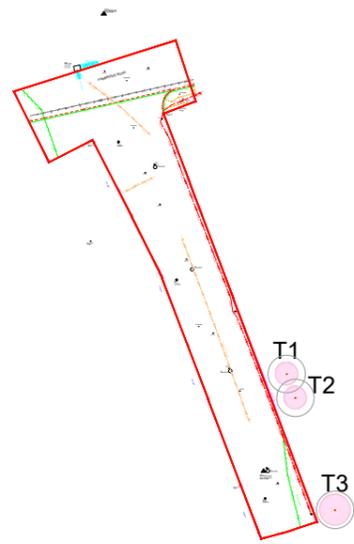

Rev	Date	Description	Drawn	Check	Approv
01	01 APR 21	FIRST ISSUE	PN	MD	BM

Client BE FIRST REGENERATION LTD
 PROJECT: LBBD INNOVATIVE SITES PROGRAMME



Site Fambridge Road, Dagenham, RM8 1NS
Client



Registered office: Arcadis House, 34 York Way, London, N1 9AB
 Coordinating office: 25 Farringdon Street, 10th Floor, London, EC4A 4AB
 Tel: 44 (0)2073 060404

www.arcadis.com

TITLE:
 FAMBRIDGE ROAD
 ARBORICULTURAL ASSESSMENT
 TREE CONSTRAINTS PLAN

Designed	M DILWORTH	Date: 01 APR 21	Signed
Drawn	P NEHETE	Date: 01 APR 21	Signed
Checked	M DILWORTH	Date: 01 APR 21	Signed
Approved	B MURRAY	Date: 01 APR 21	Signed
Scale:	1:750	Datum:	AOD
Original Size:	A3	Grid:	OS
Suitability Code:	Sx	Project Number:	10046791


Suitability Description: **PRELIMINARY**
 NOT TO BE USED FOR CONSTRUCTION

Drawing Number: 10046791-AUK-XX-XX-DR-AB-0096-01
 Revision: 01



Legend:

- Site Boundary
- - - Topographic Survey Extents
- Canopy extent of A Category tree/group
- Canopy extent of B Category tree/group
- Canopy extent of C Category tree/group
- Canopy extent of U Category tree/group
- BS5837 Root Protection Area (RPA)

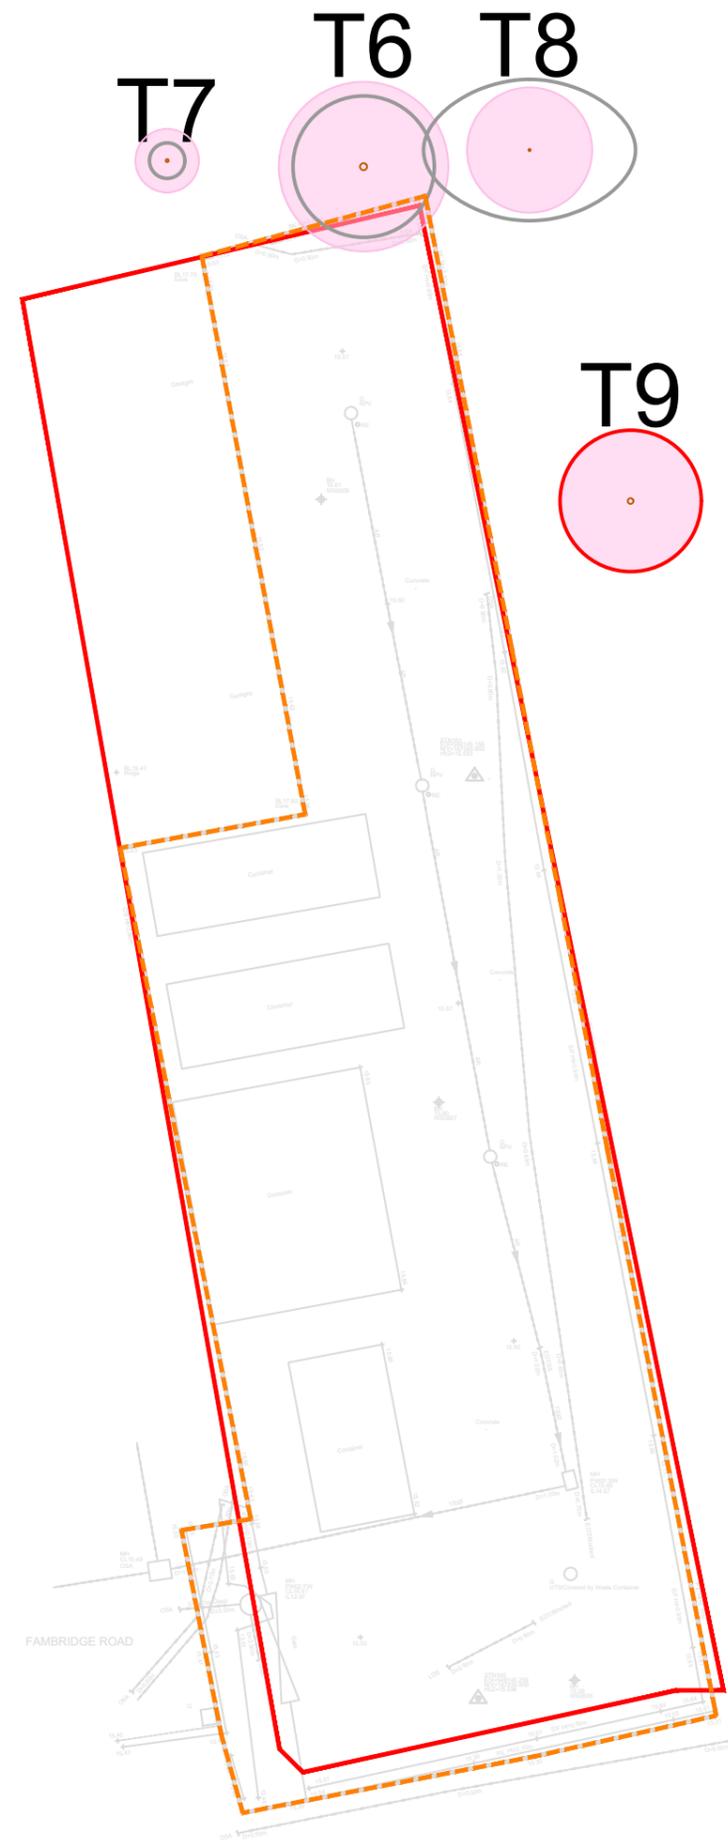

Rev	Date	Description	Drawn	Check	Approv
01	15 APR 21	FIRST ISSUE	PN	MD	BM

Client BE FIRST REGENERATION LTD
 PROJECT: LBBD INNOVATIVE SITES PROGRAMME



Site Fambridge Road, Dagenham, RM8 1NS
Client



Registered office: Arcadis House, 34 York Way, London, N1 9AB
 Coordinating office: 25 Farringdon Street, 10th Floor, London, EC4A 4AB
 Tel: 44 (0)2073 060404

www.arcadis.com

TITLE:
 FAMBRIDGE ROAD
 ARBORICULTURAL ASSESSMENT
 TREE CONSTRAINTS PLAN
 Page 1 of 3

Designed	M DILWORTH	Date	15 APR 21	Signed
Drawn	P NEHETE	Date	15 APR 21	Signed
Checked	M DILWORTH	Date	15 APR 21	Signed
Approved	B MURRAY	Date	15 APR 21	Signed
Scale:	1:600	Datum:	AOD	
Original Size:	A3	Grid:	OS	
Suitability Code:	Sx	Project Number:	10046791	


Suitability Description: **PRELIMINARY**
 NOT TO BE USED FOR CONSTRUCTION

Drawing Number: 10046791-AUK-XX-XX-DR-AB-0096-01
 Revision: 01



Legend:

- Site Boundary
- - - Topographic Survey Extents
- Canopy extent of A Category tree/group
- Canopy extent of B Category tree/group
- Canopy extent of C Category tree/group
- Canopy extent of U Category tree/group
- BS5837 Root Protection Area (RPA)

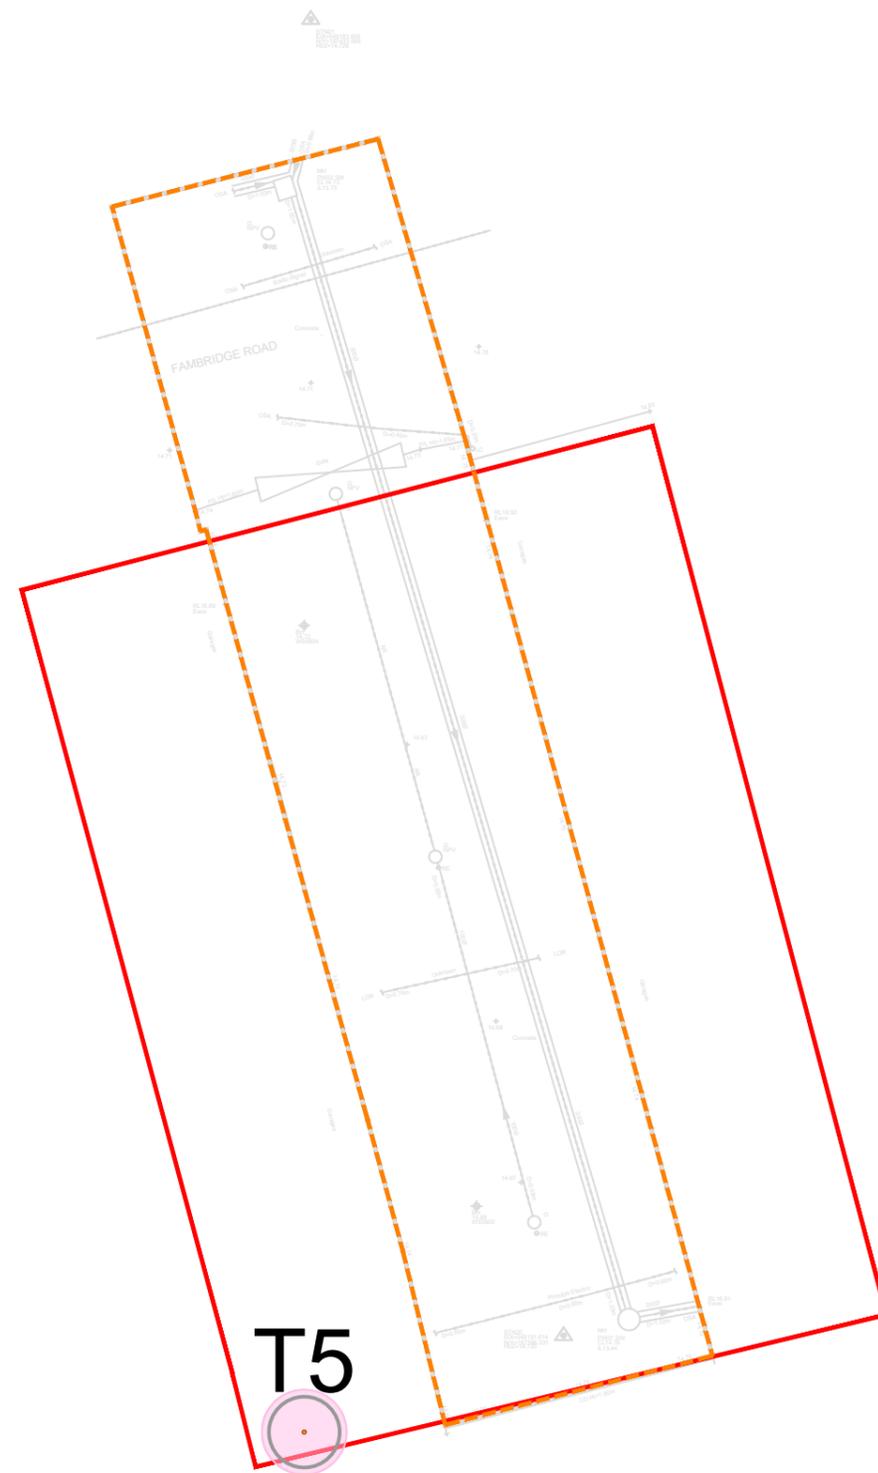

Rev	Date	Description	Drawn	Check	Approv
01	15 APR 21	FIRST ISSUE	PN	MD	BM

Client BE FIRST REGENERATION LTD
 PROJECT: LBBD INNOVATIVE SITES PROGRAMME



Site Fambridge Road, Dagenham, RM8 1NS
Client _____



Registered office: Arcadis House, 34 York Way, London, N1 9AB
 Coordinating office: 25 Farringdon Street, 10th Floor, London, EC4A 4AB
 Tel: 44 (0)2073 060404

www.arcadis.com

TITLE:
 FAMBRIDGE ROAD
 ARBORICULTURAL ASSESSMENT
 TREE CONSTRAINTS PLAN
 Page 2 of 3

Designed	M DILWORTH	Date: 15 APR 21	Signed
Drawn	P NEHETE	Date: 15 APR 21	Signed
Checked	M DILWORTH	Date: 15 APR 21	Signed
Approved	B MURRAY	Date: 15 APR 21	Signed
Scale:	1:200	Datum:	AOD
Original Size:	A3	Grid:	OS
Suitability Code:	Sx	Project Number:	10046791


Suitability Description: **PRELIMINARY**
 NOT TO BE USED FOR CONSTRUCTION

Drawing Number: 10046791-AUK-XX-XX-DR-AB-0096-01
 Revision: 01



Legend:

- Site Boundary
- - - Topographic Survey Extents
- Canopy extent of A Category tree/group
- Canopy extent of B Category tree/group
- Canopy extent of C Category tree/group
- Canopy extent of U Category tree/group
- BS5837 Root Protection Area (RPA)

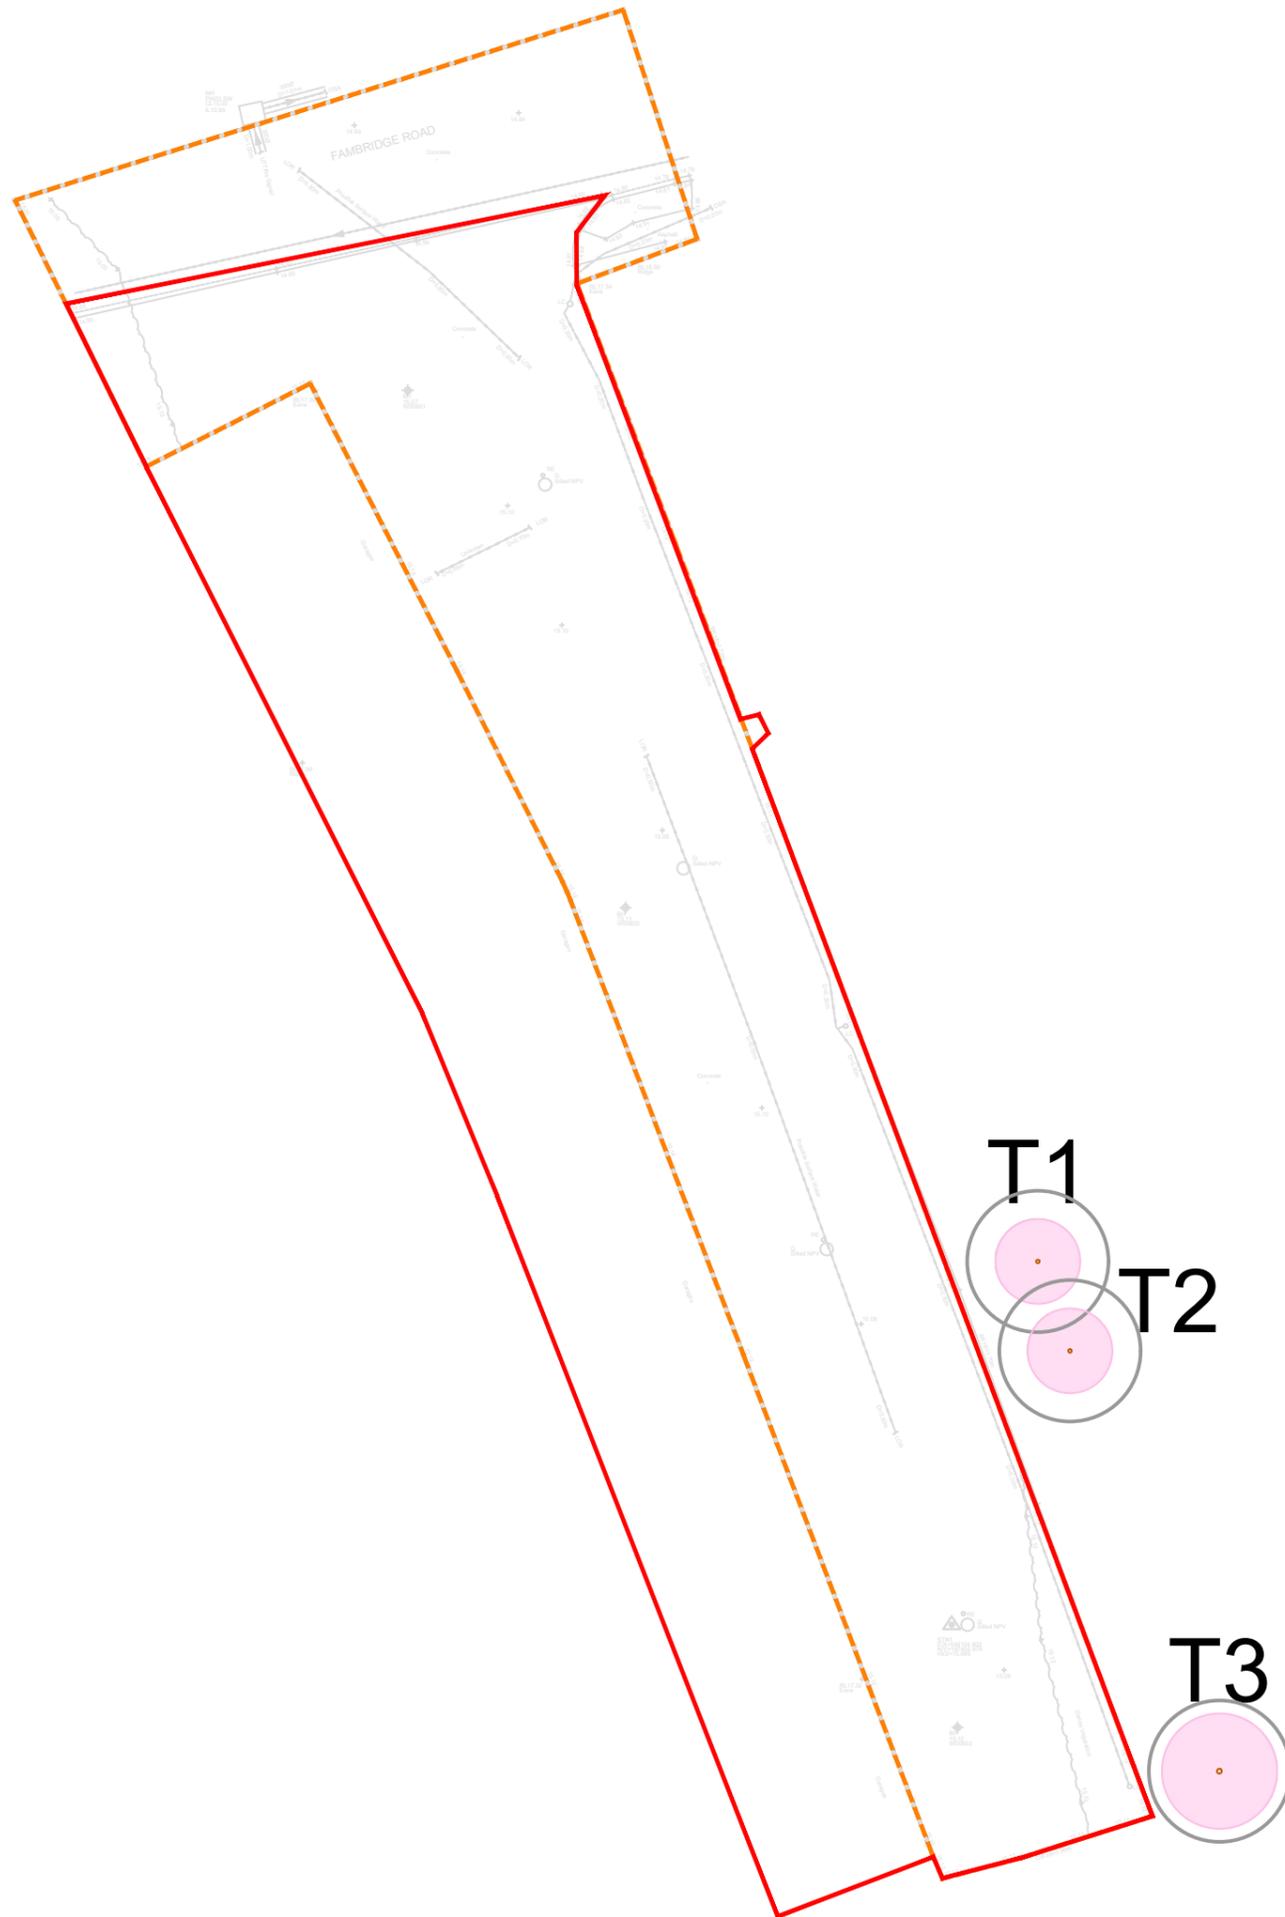

Rev	Date	Description	Drawn	Check	Approv
01	15 APR 21	FIRST ISSUE	PN	MD	BM

Client BE FIRST REGENERATION LTD
 PROJECT: LBBD INNOVATIVE SITES PROGRAMME

Site Fambridge Road, Dagenham, RM8 1NS
Client



Registered office: Arcadis House, 34 York Way, London, N1 9AB
 Coordinating office: 25 Farringdon Street, 10th Floor, London, EC4A 4AB
 Tel: 44 (0)2073 060404
 www.arcadis.com

TITLE:
 FAMBRIDGE ROAD
 ARBORICULTURAL ASSESSMENT
 TREE CONSTRAINTS PLAN
 Page 3 of 3

Designed	M DILWORTH	Date	15 APR 21	Signed	
Drawn	P NEHETE	Date	15 APR 21	Signed	
Checked	M DILWORTH	Date	15 APR 21	Signed	
Approved	B MURRAY	Date	15 APR 21	Signed	
Scale:	1:200	Datum:	AOD		
Original Size:	A3	Grid:	OS		
Suitability Code:	Sx	Project Number:	10046791		

Suitability Description: **PRELIMINARY**
 NOT TO BE USED FOR CONSTRUCTION

Drawing Number: 10046791-AUK-XX-XX-DR-AB-0096-01
 Revision: 01

APPENDIX A. Explanation of Terms

Age Class

Young – Trees in the first fifth of full life expectancy

Semi-mature – Trees in the second fifth of full life expectancy

Early-mature – Trees in the third fifth of full life expectancy

Mature – Trees in the fourth fifth of full life expectancy

Over Mature – Trees having reached full life expectancy and trees in natural decline

Veteran – Trees of interest biologically, culturally and aesthetically because of their age

Stem Diameter

The diameter of the stem measured in millimetres (mm) at a height of 1.5m above ground level

Crown Spread

Average measured in metres using a ground tape where possible

Physiological Condition

Good – Healthy tree with no signs of ill health and signs of good extension growth for species

Fair – Trees with signs of disease, minor defects and decreased life expectancy due to physical damage

Poor – Trees with significant disease, significantly reduced life expectancy and/or under major physiological stress

Dead – Dead tree or trees with over 70% crown dieback

Structural Condition

Good – Trees with no significant defects

Fair – Trees with remedial defects which require minor tree surgery works

Poor – Trees with remedial defects which require significant tree surgery works or felling

Dead – Trees which require felling

BS 5837 Retention Category

Each tree, group of trees or hedge is assigned to a retention category. Category A trees of high quality and amenity value. Category B trees of moderate quality and amenity value. Category C trees of low quality or amenity value. Category U trees of very low quality or requiring immediate removal due to health and safety concerns

British Standards BS 5837:2012 recommends that these categories may be further broken down into sub-categories A1 A2 A3 pertaining to Arboricultural, Landscape or Cultural values respectively.

APPENDIX B. Tree Schedules

Site: Fambridge Road, Dagenham, RM8 1NS

Surveyor: Martin Dilworth FdSc MArborA

Client: London Borough of Barking and Dagenham

Survey Date: 30 March 2021

Tree reference number	Species	Height (m)	Stem diameter (mm)	Branch spread (m)				Height of crown clearance (m)	Age Class	Radius of nominal circle (m)	RPA Area (m ²)	Physiological condition	Structural condition	Comments	Estimated remaining contribution (years)	Category grading
				N	E	S	W									
T1	Rowan (<i>Sorbus aucuparia</i>)	4	#100	2	2	2	2	2	SM	1.2	5	Good	Good	Located in private garden behind wall, unable to fully inspect.	10+	C1
T2	Holly (<i>Ilex aquifolium</i>)	3	#100	2	2	2	2	0	SM	1.2	5	Good	Good	Located in private garden behind wall, unable to fully inspect.	10+	C1
T3	Common plum (<i>Prunus domestica</i>)	5	#80 80 75	2	2	2	2	1	SM	1.63	8	Good	Good	Multiple stems at ground level. Located in private garden behind fence, unable to fully inspect.	10+	C1
T4	Common Apple (<i>Malus domestica</i>)	4	#300	3	3	3	3	0	M	3.6	41	Good	Good	Located on adjacent land behind garages, unable to fully inspect. TPO ref: TPO/13/2013	10+	C1
T5	Firethorn (<i>Pyracantha coccinea</i>)	3	#100	1	1	1	1	0	SM	1.2	5	Good	Good	Located in private garden behind garages, unable to fully inspect .	10+	C1
T6	Cherry laurel (<i>Prunus laurocerasus</i>)	4	#200	2	2	2	2	0	EM	2.4	18	Good	Good	Located in private garden behind wall, unable to fully inspect.	10+	C1
T7	Rowan (<i>Sorbus aucuparia</i>)	3	75	0.5	0.5	0.5	0.5	1.5	Y	0.9	3	Good	Good	Newly planted tree with tree stakes and tree guard.	10+	C1
T8	Privet (<i>Ligustrum vulgare</i>)	3	#60	2	3	2	3	0	EM	1.77	10	Good	Good	Multiple stems at ground level. Located in private garden behind wall, unable to fully inspect. TPO ref: TPO/1/2014	10+	C1
T9	Sycamore (<i>Acer pseudoplatanus</i>)	3	110 100 75	2	2	2	2	2	Y	2	13	Good	Fair	Located on adjacent land. Selfseeded young tree. Multiple stems at ground level growing through metal fence. TPO ref: TPO/1/2014	<10	U

estimated trees

Table B2 Key to Categories

Trees unsuitable for retention				
Category and Definition	Criteria (including subcategories where appropriate)			Identification on Plan
Category U Those in such a condition that they cannot realistically be retained as a living tree in the context of the current land use for longer than 10 years.	<ul style="list-style-type: none"> Trees that have a serious, irremediable structural defect such that their early loss is expected due to collapse, including those that will become unviable after removal of other U category trees (i.e. Where for whatever reason the loss of companion shelter cannot be mitigated by pruning) Trees that are dead or are showing signs of significant immediate or irreversible overall decline. Trees infected with pathogens of significance to the health and or safety of other trees nearby by or very low-quality trees suppressing adjacent trees of better quality. 			Red
Trees to be considered for retention				
Category and Definition	1. Mainly arboricultural values	2. Mainly landscape values	3. Mainly cultural values	Identification on Plan
Category A Trees of high quality with an estimated remaining life expectancy of at least 40 years	Trees that are a particularly good example of their species, especially if rare or unusual, or essential components of groups or of formal or semi-formal arboricultural features.	Tree groups or woodlands of particular visual importance as arboricultural and/or landscape features.	Tree groups or woodlands of significant conservation historical, commemorative or other value	Green
Category B Trees of moderate quality with an estimated remaining life expectancy of at least 20 years.	Trees that might be included in the high category but are downgraded because of impaired condition.	Trees present in numbers, usually as groups or woodlands such that they attract a higher collective rating than they might as individuals: or trees occurring as collectives but situated so as to make little visual contribution to the wider locality.	Trees with material conservation or other cultural benefits.	Blue
Category C Trees of low quality with an estimated remaining life expectancy of at least 10 years, or young trees with a stem diameter below 150mm.	Unremarkable trees of very limited merit or such impaired condition that they do not qualify in higher categories.	Trees present in groups or woodlands but without this conferring on them significantly greater landscape value and/or trees offering low or only temporary/transient landscape benefits.	Trees with no material conservation or other cultural benefits.	Grey

APPENDIX C. Preliminary Arboricultural Method Statement

Overview

This Preliminary Arboricultural Method Statement provides generic best practice measures to be adopted in order to protect retained trees during the development process. It has been prepared in order to inform the planning and the construction/ development process.

Protective Fencing

The purpose of this fencing is to provide protection to the RPA of retained trees/groups and to protect trees and hedgerows prior to their translocation. By default, tree Protection Fencing should comprise 2-metre-high Heras® type galvanized weldmesh panels, which must be secured to the ground and supported by a system of vertical and horizontal scaffold tubes and supporting back stays as specified in Figure 2 of BS 5837:2012.

It may be appropriate to install lower grades/specifications of fencing where construction operations are lighter or where construction traffic is reduced. Fencing installed should be appropriate to the level of adjacent construction activity and must be agreed with the Local Authority tree officer. Weather-proof notices shall be attached to any protective fencing located adjacent to retained trees displaying the words “Construction Exclusion Zone” and listing restrictions which apply. All personnel must be made aware of these restrictions.

It is anticipated that three specifications for fencing could be employed during construction.

Default fencing specification

This system involves driving scaffold poles into the ground, onto which are affixed horizontal scaffold poles and diagonal bracing struts. Anti-climb weldmesh panels are secured to this scaffold framework using standard scaffold clips or wire. The system is illustrated in diagram Figure. C1 and is based on *BS 5837:2012 Trees in relation to design, demolition and construction – Recommendations (British Standards Institution, 2012)* (Ref 1) guidelines. This kind of system provides the highest level of security and should be the default system for tree protection measures unless agreed otherwise by the LPA Tree Officer.


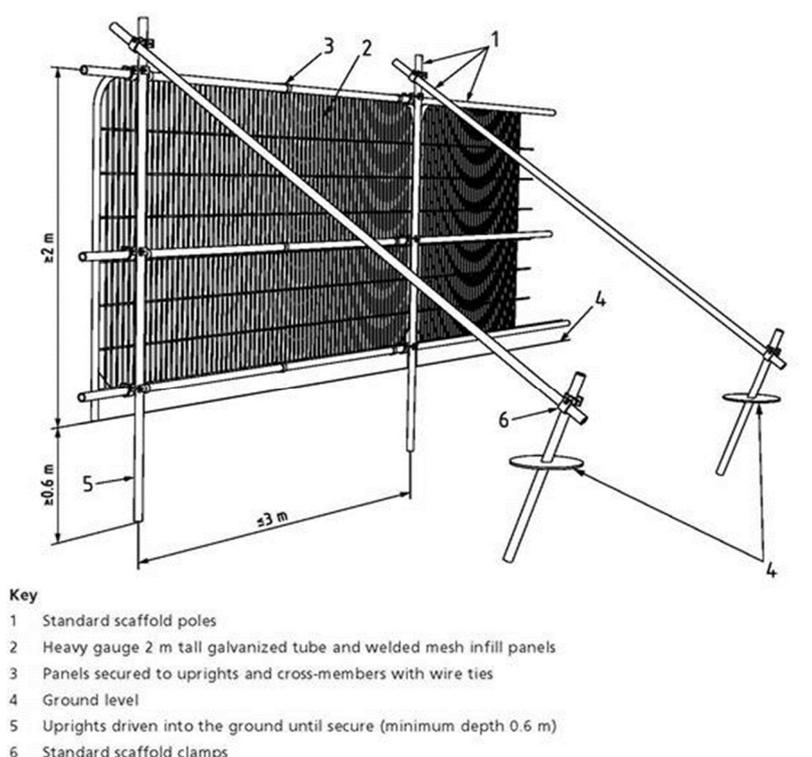



Figure C1 Tree Protection Fencing specification (extract from BS5837)

Medium-use areas

This system comprises anti-climb weldmesh panels connected by clamps and supported by rubber or concrete bases and bracing struts. The system is illustrated in Figure C2 and is based on *BS 5837:2012 Trees in relation to design, demolition and construction – Recommendations* (British Standards Institution, 2012) (Ref 1) guidelines. This kind of system is robust enough to withstand occasional knocks by plant machinery. This system may be suitable for medium to low use areas of a construction site or where conventional back prop systems cannot be installed. i.e. Areas of hardstanding. The use of this system in select areas should be agreed upon by the LPA tree officer.

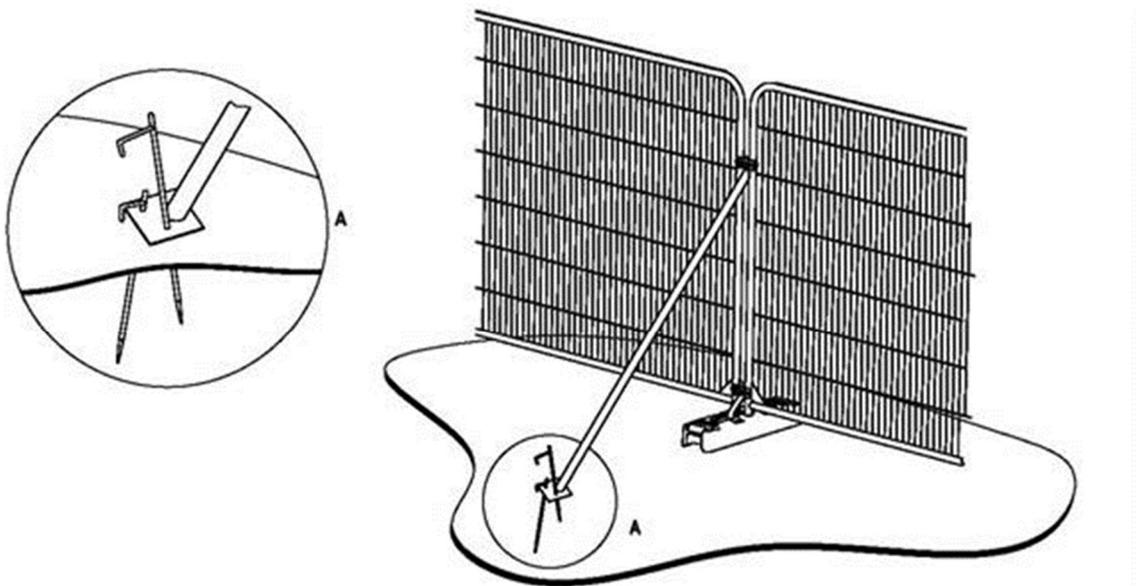

a) Stabilizer strut with base plate secured with ground pins

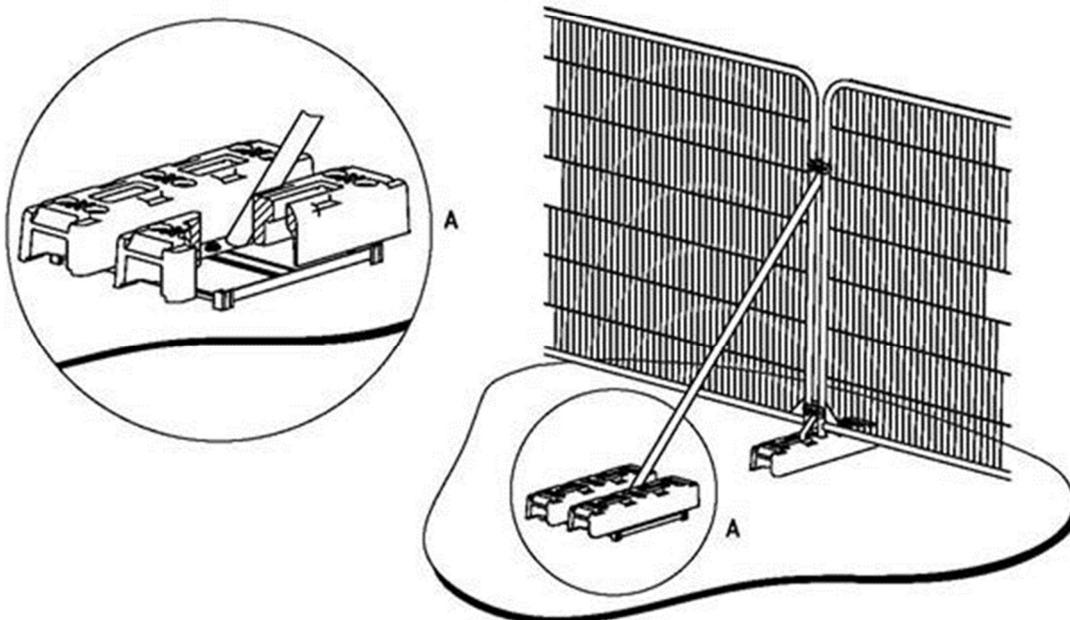

b) Stabilizer strut mounted on block tray

Figure C2 Tree Protection Fencing specification (extract from BS 5837)

Low-use areas

The system illustrated in Figure C3 is adequate to define areas of protected vegetation and exclude traffic, where there are little to no works or construction traffic accessing an area. The system comprises Cleft Chestnut Pale Fence in accordance with *BS 1722 Part 4: Specification for cleft chestnut pale fences (British Standards Institution, 1991)* supported by 150mm wooden stakes. Assembled with galvanized 14-gauge (2 mm) wire, four strands per row, peeled and pointed one end. Approximate spacing of pales 75 mm. the use of this system on a construction site should be agreed upon in writing by the LPA Tree officer and Arboricultural Consultant.



Figure C3 Tree Protection fencing example for low use areas

Construction Exclusion Zone (CEZ)

The Construction Exclusion Zone (CEZ) is the area identified by an arboriculturist to be protected during development, including Site clearance and construction work, through the use of barriers and/or ground protection fit-for-purpose to ensure the successful long-term retention of a tree. The area within the construction exclusion zone is to be regarded as sacrosanct and the fencing shall not be taken down or relocated at any time.

All areas excluded by protective tree fencing shall be treated as CEZs, and the following restrictions shall apply:

- No construction activity whatsoever must occur within these areas.
- No tree works, without the written consent from the Local Authority.
- No alterations of ground levels or conditions.
- No chemicals or cement washings.
- No excavation.
- No temporary structures. *
- No storage of soil, rubble or other materials.
- No vehicles or machinery to be used or parked without appropriate ground protection measures as per BS5837 recommendations. This will require the use of a proprietary system of reinforced concrete slabs/steel road plates on a compressible layer, or side butting scaffold boards/ 18mm plywood sheets on a compressible layer. The type of ground protection used shall be appropriate for the likely loading applied.
- No fixtures (lighting, signs etc.) to be attached to trees.
- No fires within 10 metres of the canopies of any tree or hedgerow.

1

**Sales Cabins or Site huts, provided they are of the Jack Leg type, can be sited to act as ground protection for the duration of the construction.*

General Construction Activity

Since the canopies of retained trees may be in close proximity to areas of crane operation, the following restrictions will apply:

- All cranes will be sited outside the defined RPAs of retained trees / groups, and the appointed contractor will ensure all relevant personnel shall be made aware of the location of branches and the need to avoid causing damage to them.
- Prior to the implementation of lifting operations, a representative from the equipment supply company shall visit the Site and ensure all operations can be completed without causing damage to retained trees. A lifting plan will be prepared and submitted for approval prior to all lifting operations. The lifting plan will make provision for the potential for damage of retained trees.
- All lifting operations will be completed under the close direction of a qualified banksman, who will be briefed by the appointed contractor as to the need to avoid damage the stems and branches of retained trees.
- Should additional tree removal or pruning be required the Local Authority Tree Officer shall be contacted and the scope of works agreed in writing.
- All materials will be stored within designated areas and no materials shall be stored within any RPA.

Hazardous Materials

Any mixing of cement-based materials is to take place outside the RPAs of all trees. Provision shall be made to ensure that the mixing area is contained so that no water runoff enters the RPAs of any trees. All mixers and barrows shall be cleaned within this dedicated mixing area.

All other chemicals hazardous to tree health, including petrol and diesel, are to be stored in suitable containers as specified by the Control of Substances Hazardous to Health (COSHH) Regulations (2002) (Ref 4), and kept away from the RPAs.

Example of Protective Fencing Signs



APPENDIX D. Photographs


Tree No.	Description	Photograph
T1	Rowan (<i>Sorbus aucuparia</i>)	 A photograph showing a Rowan tree (Sorbus aucuparia) with sparse, light-colored foliage. The tree is positioned next to a brick wall with a decorative diamond-patterned lattice. A white van is partially visible on the left side of the frame. The background shows a residential building under a clear blue sky.
T2	Holly (<i>Ilex aquifolium</i>)	 A photograph showing a Holly tree (Ilex aquifolium) with dense, dark green foliage. The tree is positioned next to a brick wall with a decorative diamond-patterned lattice. A concrete block is visible on the right side of the frame. The background shows a residential building under a clear sky.

Tree No.	Description	Photograph
T3	Common plum (<i>Prunus domestica</i>)	
T4	Common Apple (<i>Malus domestica</i>)	
T5	Firethorn (<i>Pyracantha coccinea</i>)	

Tree No.	Description	Photograph
T6	Cherry laurel (<i>Prunus laurocerasus</i>)	
T7	Rowan (<i>Sorbus aucuparia</i>)	
T8	Privet (<i>Ligustrum vulgare</i>)	

Tree No.	Description	Photograph
T9	Sycamore (<i>Acer pseudoplatanus</i>)	

APPENDIX E. TPO Map

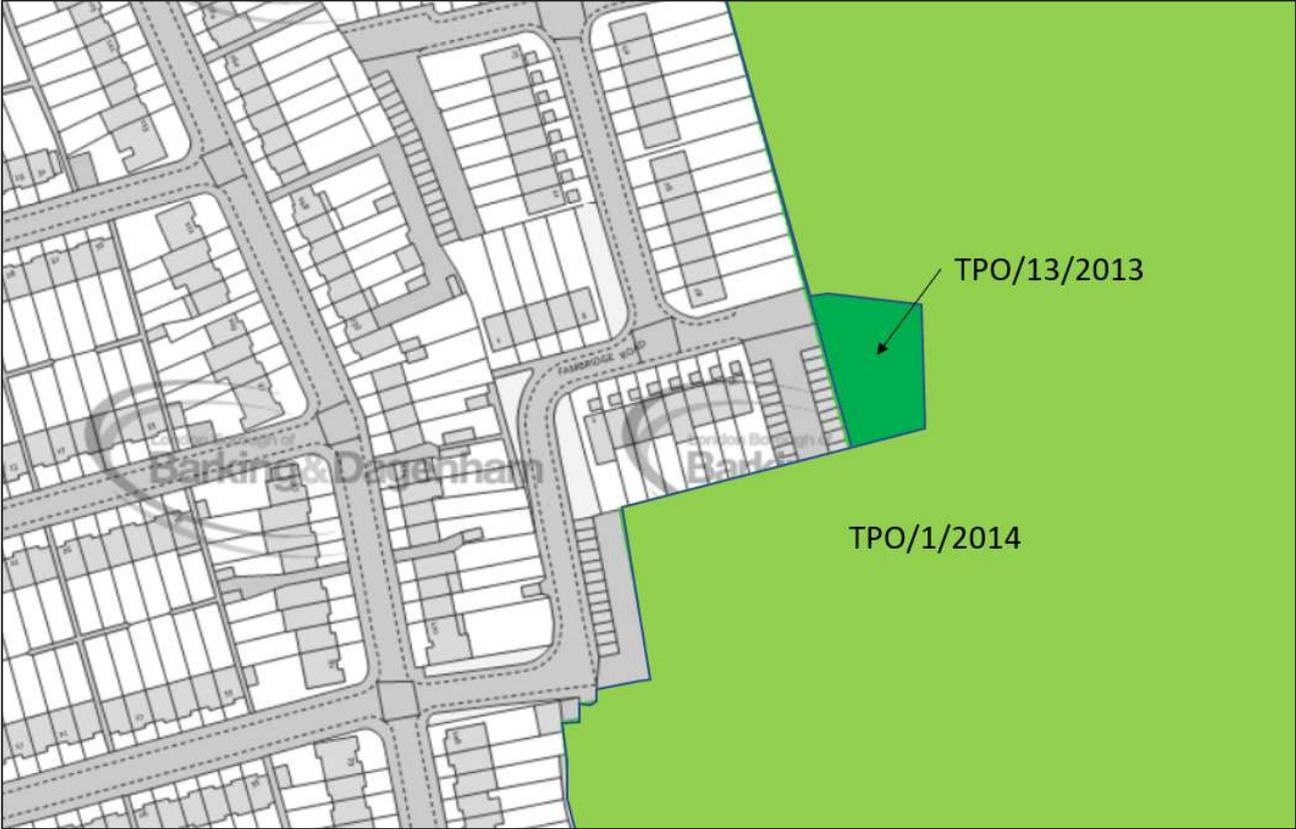

Arcadis Consulting (UK) Limited

Arcadis House,
34 York Way,
London, N1 9AB
United Kingdom

www.arcadis.com